	DESCRIPTION
1	LV INT. 10-H BUSHING
2	LV BLADE SUPPORT
3	2 HOLE HORIZ NEMA GRD PAD
4	HV PORC 95BIL W/2H G-SPADE
6	NEUTRAL HV BUSHING
7	NP ON DOOR SER ON TANK
8	TANK
9	COOLING RADIATORS
10	HANDHOLE & SECURITY COVER
12	LIFTING LUGS
13	JACKING PROVISIONS
14	2 HOLE HORIZ NEMA GRD PAD
15	1 IN DRAIN VALVE AND SAMPLER
21	PAD LOCKABLE DOOR HANDLE
22	3 PT LATCH PENTA SEC BOLT
24	18 IN REMOVABLE SILL
25	METAL LV-HV BARRIER
47	PRESS. REL VALVE
48	DIAL THERM W/MAX POINTER
49	2" MAG LL GAUGE: LV COMP
50	OIL LEVEL PLUG
51	TAP CHANGER HANDLE
56	PROVISIONS FOR LTG ARR
57	PRES VAC GAUGE

	SPECIAL NOTES
A	
B	
C	
D	
E	

CAT NO	9396435411035		
DWG BY:	WM	DATE:	05/05/06
APP BY:	JB	CC.	745

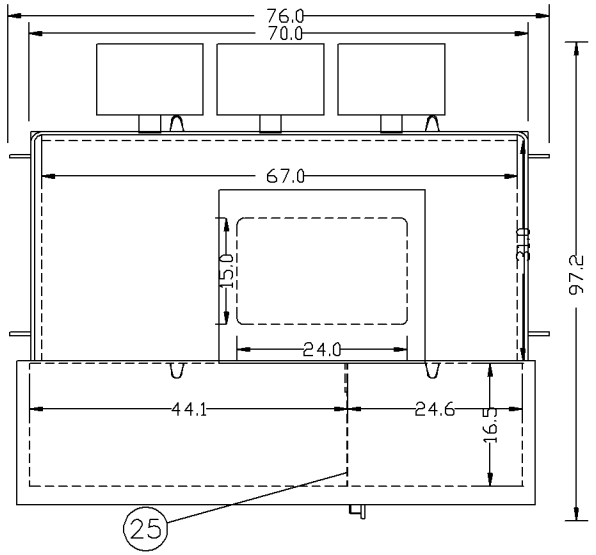

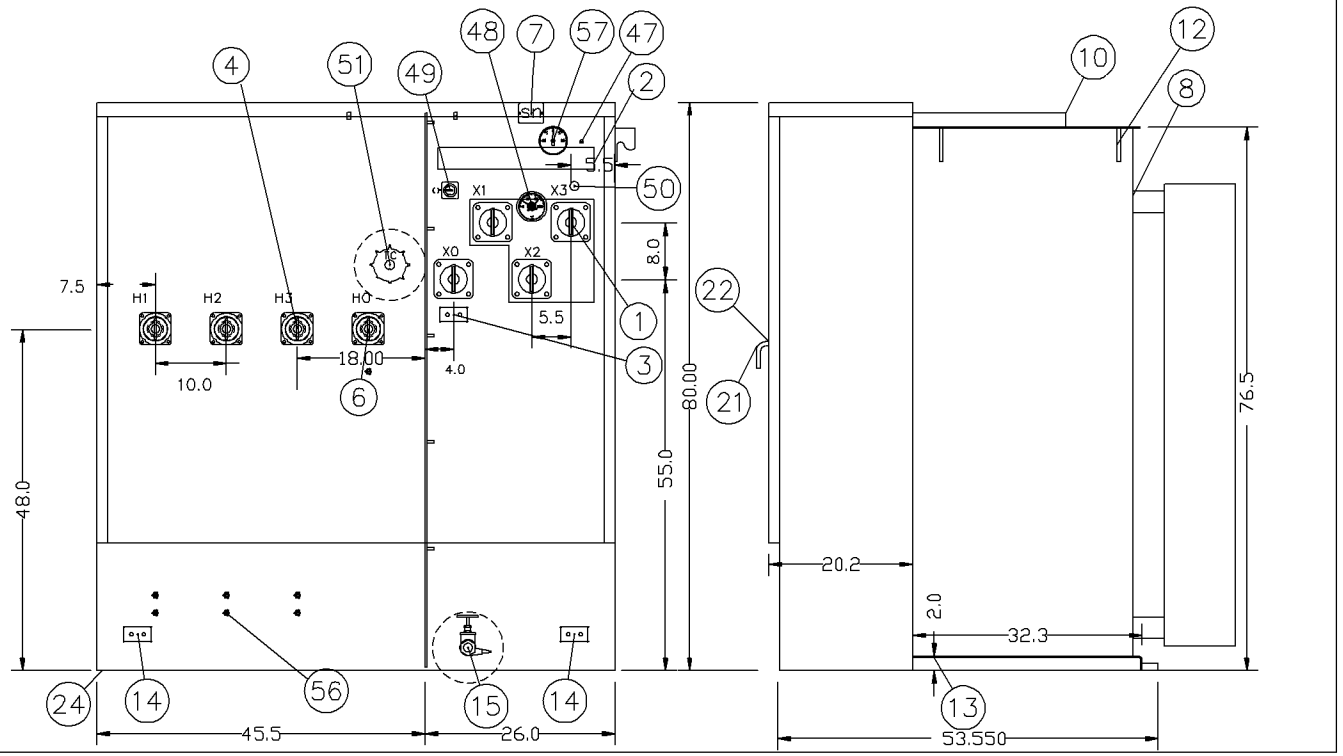

DWG NO.	0073475041.148

HOWARD INDUSTRIES INC.
LAUREL, MISS. USA 39440
THREE PHASE PAD DISTRIBUTION TRANSFORMERS

CUSTOMER :	GENERGY
SPEC. H.I. STD.	DATED
KVA 2500.0BIL 95 TAPS SPECIAL	
HIGH VOLTAGE	13200GRDY/7620
LOW VOLTAGE	480Y/277
APPROX. CORE AND COIL WEIGHT	5789
APPROX. TANK AND ACCESS. WEIGHT	3434
GAL. OF OIL 563; APPROX. WEIGHT	4223
APPROX. TOTAL WEIGHT	13446

REV.	DATE	DESCRIPTION	BY / APP
A			

ID 3WMD7815 P.N. 0073475041.148

9396-435411-035 GENERGY

0.042

93966301Z,CB,514, 0,H01 , 0, 3, 5U

746731, 807169,6, 4973,2, 23766

59088618.610

3WMD7815